6 POMMEL HEIGHT ADJUSTMENT

To adjust the height of the pommel you will need to use the Allen key located on the side of the hydraulic cylinder. Loosen the set screw located on the right side at the bottom of the stander core **(fig. 6)**, then slide the pommel to the desired height. Use the Allen key to firmly retighten the set screw.

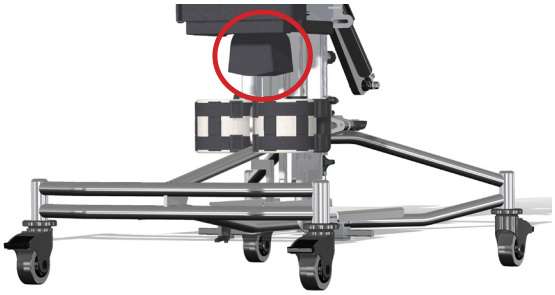

fig. 6

Synetik
ErgoCare

Phone
+1 450 752 8818

Toll-Free
+1 888 752 8818

1242 De Lanaudière, Joliette
Québec J6E 3P1
synetikergocare.com