


TOM 5 STREETER

Reversible
and
detachable
seat unit



- Height adjustable backrest
- Seat depth and width adjustment
- Seat unit with fully adjustable tilt-in-space function
- Fully reclining backrest with lateral supports
- Angle and height adjustable footrest
- Angle adjustable footplate
- Front swivel wheels / rear locking wheels
- Height adjustable ergonomic push handle
- Upholstery with reflective safety marks
- Includes a basket, hip rest and a padded frame cover

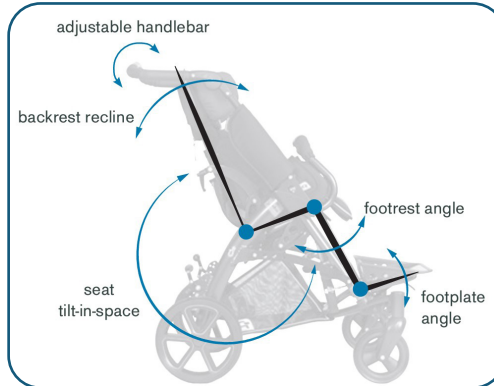

Compliant with ISO 7176-19

Available color



Available sizes
(Additional details on the back)

MINI

STD

MAXI



Backrest height
adjustment



Seat depth adjustment



Seat width adjustment



Footrest height
adjustment



Front swivel wheels



Foldable design



FEATURES



Grows with
the user



3 size
options



Advanced
rehabilitation
stroller



Adjustable
seat depth



Height
and angle
adjustable
backrest



Height
adjustable
and foldable
footrest



Foot operated
caster lock



Crash-tested

+ OPTIONAL EQUIPMENT



Side head cushion



Chest immobilization belt



Belt 4 points




High position

Low position

Tom 5 seat interface



Crural belt



Abduction pommel



Padded frame cover with side protection



Contact us to learn more about our wide range of accessories

+ TECHNICAL SPECIFICATIONS



	MINI	STD	MAXI
Backrest height	17.3" - 22.4"	20.1" - 26.7"	21.6" - 27.5"
Seat depth	7.3" - 10.6"	9" - 13"	11.4" - 15.7"
Seat width	8.6" - 11"	9.8" - 13.8"	10.6" - 15.3"
Seat to footrest	3.5" - 10.2"	4.7" - 14.1"	4.7" - 15.3"
Backrest angle	0° - 170°	0° - 170°	0° - 170°
Seat angle	+40° / 20°	+40° / 20°	+40° / 20°
Total length	29.9"	29.9"	29.9"
Total width	23.2"	24.8"	26.4"
Total height with handle	37.4" - 43.3"	38.2" - 43.7"	38.2" - 46.5"
Weight	33 lbs	37.5 lbs	41.9"
Maximum load	77 lbs	88 lbs	110 lbs
Folded stroller length	33"	33.5"	33.9"
Folded stroller width	23.2"	24.8"	26.4"
Folded stroller height	14.2"	14.6"	14.6"



1242 rue de Lanaudière
Joliette (Quebec) Canada
J6E 3P1



450.759.9449
1.866.739.2400



client@synetikgroup.com